## CARMIX 3500TC

# NEW CONCEPT EFFICIENCY

### 

**NEW CARMIX** CONCRETE-MATE: IN-DRUM PROBE, THE ULTIMATE ELECTRONIC SCALE, **EASY TO USE AND EXTRA ACCURATE** FOR ANY KIND OF **MIX-DESIGN** 

**NEW PROMIX: TO ANALYZE YOUR CONCRETE RIGHT** IN THE CAB

**NEW CAB: CONFORT, SAFE AND VISIBILITY** MATCHING EDGE DESIGN



#### METALGALANTE S.p.A.

Via A. Volta 2 - Noventa di Piave (Venice) ITALY T. +39 0421 65191 - F. +39 0421 658838 Skype: Carmix.main - info@carmix.com

follow us on:









METALGALANTE S.P.A. certified company

carmix.com





## CARMIX 3500TC



MIXING UNIT: Drum capacity 4.850 liters. Concrete drum output: 3,5 m3. EN 206-1 IN SLUMP S1 Class, yield not vibrated. Double mixing screws, cover for emergency unloading. Drum rotation by hydraulic motor and planetary reducers. Mixing and discharging speed indipendent from r.p.m. of diesel engine. Discharging by reversing drum. The mixing unit is slewing hydraulically through 270° for high discharge over 2 m on the four sides of the vehicle.



ENGINE: Perkins 1104 D-44 TA Turbo-Diesel, watercooled, 4 cylinders. Rated power KW 83 (111 HP) set at 2.300 rpm. Engine mounted transversal on the rear.



TRANSMISSION: Hydrostatic Bosch Rexroth. Pump and motor are connected to the differentials through a 2 speed reducer (working and transfer). 4 wheel drive and steering.




AXLES: Dana Spicer with oil bath disc brakes and planetary reducers.

CHUTE: Slewing and hydraulically tilting. Fitted with two pins easily detachable to increase the discharge height.

WATER SYSTEM: Self-contained. Hydraulic driven water pump, water meter, washing outlet 400(\*)min High pressure water pump.

**GRADIENT: Fully loaded 30%** 



TYRES: Off road industrial type 16/70-20 PR 14.



STEERING: Hydrostatic. 3 ways steering. Radius: internal: mm. 1700, external mm 3.700.



SPEED:Working speed from 0 to 9 km/h, road transfer from 0 to 25 km/h. Electric servo control.

NEW ROPS-FOPS CAB: (UNI 11023) Confort, safe and visibility matching edge design.

HYDRAULIC SYSTEM: Three circuits. 2 variable outlet pumps for hydrostatic transmission and drum rotation. 2 gear pumps for services. Inlet and outlet filter. Heat exchanger water/oil-air type.

JOYMIX: All hydraulic functions of shovel controlled by a single - fully servo controlled Joystick.



CONCRETE-MATE: Ultimate "4 sensors" electronic scale, easy to use and extra accurate for any kind of mix-design.



PROMIX: New In-drum probe, easy allows to anayze your concrete: slump, volume, temperature, humidity and ready-mix indicator: Your on site Lab! (on request)



LOADING SHOVEL: Effective capacity per load 600 liters, complete with hydraulic opening gate. 6 buckets only per batch.

#### WHAT MAKES CARMIX THE BEST OFF-ROAD **MOBILE BATCHING PLANT**

#### TWO YEARS WARRANTY.

- extra accurate for any kind of mix design.
- (on request)
- Rich fully equipped cockpit. Ergonomic Joymix; one joystick operates all main functions.
- Self-Articulated hydraulically operating shovel for a more
- Rear engine: easy checks. Fully balanced equipment.

- Over 40 years of experience in the toughest jobsites.

CONCRETE-MATE: Ultimate "4 sensors" electronic scale, easy to use and

• PROMIX: New In-drum probe, easy allows to analyze your concrete: slump, volume, temperature, aridity and ready-mix indicator: Your on site Lab!

• NEW CAB confort, safe and visibility matching edge design, front driving cab to assure perfect visibility and excellent comfort to the operator.

accurate loading of aggregates and cement. 6 buckets only per batch

Oil-bath built-in disc brakes: no maintenance at all and total reliability.

 CARMIX selects the best suppliers in order to assure its customers not only with top quality but also their worldwide after-sale network.

 Among others we are proud to name PERKINS engines, BOSCH-REXROTH transmissions, DANFOSS hydraulic motors, DANA SPICER axles,

ELECTRIC SYSTEM: 12 Volt. 120 Ah battery for electric starter and road lighting. Safety battery cut-off.

TANKS: Water: 2x400 liters. Diesel: 115 liters, (approx. 10 hours work). Hydraulic oil: 80 liters..


CHASSIS: Steel profile specially engineered for off-road operations


WEIGHT: About Kg. 7.400. Equally distributed on both

SAFETY: Machine equipped with checking and block valves for maximum safety of the operator. Self control avoids drum to slew if shovel's arm is lifted.

CATALOGUE: The machine is equipped with Use and Manteinance and Spare Parts Manuals according to CE regulations.



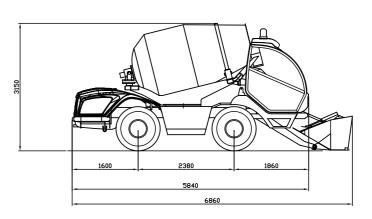



LOADING SHOVEL: Effective capacity 600 liters, self articulated complete with hydraulic opening gate. 6 bukets only per batch


NFW CAB: Confort, safe and visibility matching edge design.

CONCRETE-MATE: Ultimate "4 sensors" electronic scale, easy to use and extra accurate for any kind of mix







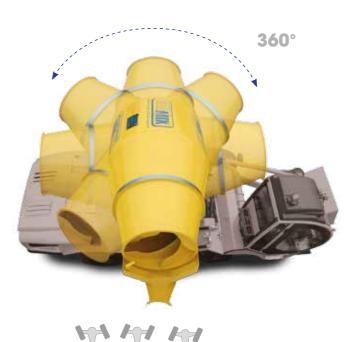

#### **ACCESSORIES ON DEMAND**

PROMIX: In-drum probe, easy allows to analyze your concrete: slump, volume, temperature, humidity and ready-mix indicator: Your on site Lab!

- Additive Plant
- Clima (air conditioning plus heater)
- Air Conditioned
- Heater
- Spare wheel
- Additional discharging chute (cm 100)

4X4X4